



## Compendium of DMS Series

**Three types of sensors**

<b>General type(DMS)</b>	<b>Waterproof type(Yellow)</b>
General type(Aqua Blue)	Waterproof type(Yellow)
<b>Manipulator industry(A05-DMS)</b>	<b>Oil resistance and deflection resistance (A06-DMS)</b>
Product characteristics: 1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain. 2. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures.	Product characteristics: 1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain. 2. In case of welding slag, corresponding protective measures shall be taken for the sensor.
<b>High deflection wire</b>	<b>Oil resistant and flexural curve material</b>
The deflection is increased by about 20% compared with the general type	The deflection is increased by about 20% compared with the general type. It can be used in oil dust environment.
	<b>Waterproof design(IP68)</b>

Note: The recommended minimum bending radius of A05-DMS, A06-DMS cables is 19mm.

**Bending resistance**

**SR: bending resistance**


**Impact resistant materials**

**Two kinds of accessories**

DMSG can be mounted with 2 accessories, applicable to multi-cylinders.

<b>DMSG</b>	<b>F-MQ</b>
	<b>F-SC=SH</b>

### Four types of cross section

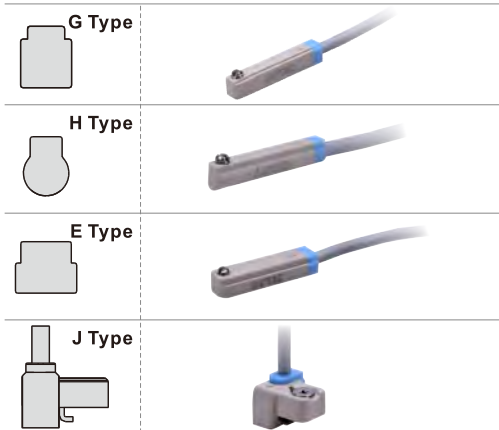

### DMS Specifications

Item	DMS		
	2-wire	NPN	PNP
Model			
Power supply voltage	10V ~ 28V DC	5V ~ 30V DC	
Switching current	2.5mA ~ 100mA	30V/200mA Max.	
Contact capacity	2.8W Max.	6.0W Max.	
Current consumption	3mA Max.	5mA Max.	
Internal voltage drop	3.5V Max.	0.7V Max.	
Leakage current	0.05mA Max.	0.01mA Max.	
Switching frequency	1000Hz		
Impact resistance	50G		
Circuit protection	Reverse polarity protection Surge protection		
Operating Temp.	-10°C ~ 70°C		
Enclosure	DMS, A05-DMS: IP64 / A06-DMS: IP68		
Standard	CE marking, RoHS		

[Note] A05 \ A06 type has only two-wire type.

### Ordering code for DMS

DMS G - □ 020 - □	G	H	E	J	M08	M12
A05-DMS G - □ 020						
A06-DMS G - □ 020						

① ② ③ ④ ⑤ ⑥

① Industry code	Blank: General type A05: Manipulator industry A06: Oil resistance and deflection resistance
② Model	DMS : Solid State Sensor
③ Specifications	G H E J [Noet1]
④ Output type	Blank: 2 wire N : NPN [Noet2] P : PNP
⑤ Lead wire	Direct lead wire
	Plug connector [Noet3]
⑥ Additional specification	Blank: General type W: Waterproof type IP68 [note4]

M08: 0.5m with M8 plug connector  
M08010: 1m with M8 plug connector  
M08020: 2m with M8 plug connector  
M08030: 3m with M8 plug connector  
M12: 0.5m with M12 plug connector  
M12010: 1m with M12 plug connector  
M12020: 2m with M12 plug connector  
M12030: 3m with M12 plug connector

[Note1] Type J is not available for A06. [Note2] A05 and A06 have no NPN and PNP option. [Note3] A05 and A06 have no plug connector option. [Note4] A05, J type and M08, M12 don't have a-w Waterproof option. Standard A06 model already has a waterproof function. Add: The sockets of M08 and M12 need additional order. Please check on page 585.





## Compendium of EMS Series

**Three types of sensors**

<b>General type(EMS)</b>	<b>Waterproof type(Yellow)</b>
General type(Aqua Blue)	Waterproof type(Yellow)

**General type(Aqua Blue)**

**Waterproof type(Yellow)**

**Manipulator industry(A05-EMS)**

**Oil resistance and deflection resistance (A06-EMS)**

**Product characteristics:**

1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain.

2. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures.

**High deflection wire**

The deflection is increased by about 20% compared with the general type

**Oil resistant and flexural curve material**

The deflection is increased by about 20% compared with the general type. It can be used in oil dust environment.

**Waterproof design(IP68)**

**Bending resistance**

**SR: bending resistance**

**Impact resistant materials**

**High cylinder installation flexibility**

EMSG is the mini type corresponding to DMSG, which can be used for long and short strokes. EMSH is the mini type corresponding to DMSH, which can be used for long and short strokes.

Note: The recommended minimum bending radius of A05-EMS, A06-EMS cables is 19mm.

### Two types of cross section

<b>G Type</b>	General type(Aqua Blue)	Waterproof type(Yellow)
<b>H Type</b>	General type(Aqua Blue)	Waterproof type(Yellow)

### EMS Specifications

Item	EMS
Model	2-wire
Power supply voltage	10V ~ 28V DC
Switching current	2.5mA ~ 100mA
Contact capacity	2.8W Max.
Current consumption	3mA Max.
Internal voltage drop	3.5V Max.
Leakage current	0.06mA Max.
Switching frequency	1000Hz
Impact resistance	50G
Circuit protection	Reverse polarity protection Surge protection
Operating Temp.	-10°C ~ 70°C
Enclosure	EMS, A05-EMS: IP64 / A06-EMS: IP68
Standard	CE marking, RoHS
Note	Temperature overheat protection

### Ordering code for EMS

<b>EMS G - □ 020 - □</b>	
<b>A05-EMS G - □ 020</b>	
<b>A06-EMS G - □ 020</b>	

① ② ③ ④ ⑤ ⑥

① Industry code	Blank: General type A05: Manipulator industry A06: Oil resistance and deflection resistance
② Model	EMS : Solid State Sensor
③ Specifications	G H
④ Output type	Blank: 2 wire
⑤ Lead wire	Direct lead wire 020: 2m 030: 3m 050: 5m 100: 10m
	Plug connector [Noet1] M08: 0.5m with M8 plug connector M08010: 1m with M8 plug connector M08020: 2m with M8 plug connector M08030: 3m with M8 plug connector M12: 0.5m with M12 plug connector M12010: 1m with M12 plug connector M12020: 2m with M12 plug connector M12030: 3m with M12 plug connector
⑥ Additional specification	Blank: General type W: Waterproof type IP68 [note2]

G H

M08 M12

[Note1] A05 and A06 have no plug connector option. [Note2] A05 and A06 don't have a-w Waterproof option. Standard A06 model has a waterproof function. Add: The sockets of M08 and M12 need additional order. Please check on page 585.






## Compendium of CMS Series

**Two types of sensors**

**General type(CMS)**

General type(blue) High temperature type (red)




**Manipulator industry(A05-CMS)**

Product characteristics:


1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain.
2. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures.

**High deflection wire**

The deflection is increased by about 20% compared with the general type



**Bending resistance**

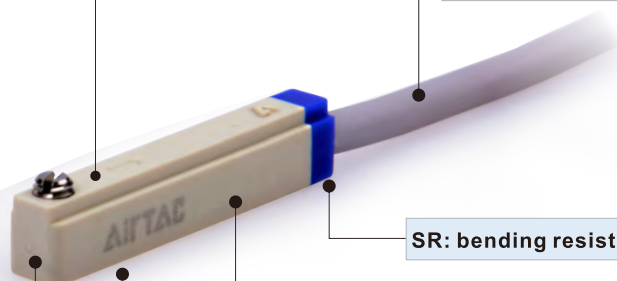









**SR: bending resistance**







**Impact resistant materials**

**Two kinds of accessories**

CMSG can be mounted with 2 accessories, applicable to multi-cylinders.

### Four types of cross section

<b>G Type</b>		
<b>H Type</b>		
<b>E Type</b>		
<b>J Type</b>		

<b>CMSG</b>		<b>F-MQ</b>		
		<b>F-SC=SH</b>		

### CMS Specifications

Item	CMS	
	General	Heat resistant
Model	General	Heat resistant
Power supply voltage	5V ~ 240V AC/DC	
Switching current	100mA	
Contact capacity	10W Max.	
Current consumption	N/A	
Internal voltage drop	2.5V Max. @100mA DC	N/A
Leakage current	N/A	
Switching frequency	200Hz	
Impact resistance	50G	
Circuit protection	N/A	
Operating Temp.	-10°C ~ 70°C	-10°C ~ 125°C
Enclosure	IP64	
Standard	CE marking, RoHS	

### Ordering code for CMS

**CMS G - 020 - □**


**A05-CMS G - 020**

① ② ③ ④ ⑤

① Industry code	Blank: General type    A05: Manipulator industry
② Model	CMS : Reed Sensor
③ Specifications	G    H    E    J
④ Lead wire	Direct lead wire
	Plug connector [Noet1]
⑤ Additional specification	Blank: General type    H:Heat resistant [note2]

020: 2m    030: 3m    050: 5m    100: 10m

M08:0.5m with M8 plug connector	M12:0.5m with M12 plug connector
M08010:1m with M8 plug connector	M12010:1m with M12 plug connector
M08020:2m with M8 plug connector	M12020:2m with M12 plug connector
M08030:3m with M8 plug connector	M12030:3m with M12 plug connector



[Note1]A05 has no plug connector option. [Note2]A05 has no heat resistant option.  
Add:The sockets of M08 and M12 need additional order. Please check on page 585.


### Ordering code for accessories

**F - MQ** □ **Cylinder Accessory**



① <b>Category</b>	F : Accessory								
② <b>Model</b>	MQ : Cylinder Accessory								
③ <b>Cylinder</b>	Aluminum alloy			Aluminum alloy (Thick type)			Stainless steel		
	Code	For series	For bore size	Code	For series	For bore size	Code	For series	For bore size
	A20: Φ20mm		Φ20	A32T: Φ32mm		Φ32	S06: Φ6mm		Φ6
	A25: Φ25mm		Φ25	A40T: Φ40mm	TWG	Φ40	S08: Φ8mm		Φ8
	A32: Φ32mm	MCK	Φ32	A50T: Φ50mm		Φ50	S10: Φ10mm		Φ10
	A40: Φ40mm	MBL	Φ40				S12: Φ12mm	PB/PBR	Φ12
	A50: Φ50mm		Φ50				S16: Φ16mm	MI	Φ16
	A63: Φ63mm		Φ63				S20: Φ20mm	MF	Φ20
	A80: Φ80mm		Φ80				S25: Φ25mm	MG	Φ25
							S32: Φ32mm	MA/MAC	Φ32
						S40: Φ40mm		Φ40	
						S50: Φ50mm		Φ50	
						S63: Φ63mm		Φ63	

**F - SC** □ **SH** **Tie Rod Cylinder Accessory**




① <b>Category</b>	F : Accessory		
② <b>Model</b>	SC : Tie Rod Cylinder Accessory		
③ <b>Cylinder</b>	Code	For series	For bore size
	32		Φ32, Φ40
	50		Φ50
	63		Φ63
	80	SC	Φ80, Φ100
	125	SGC	Φ125
	160		Φ160, Φ200
④ <b>Attached</b>	250		Φ250

## DMS, EMS, CMS Series


### Dimensions

#### DMSG/CMMSG Type

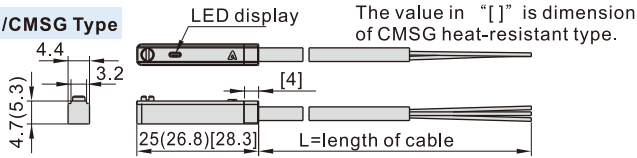


Note: The value in “( )” is dimension of CMMSG type.

#### DMSE/CMSE Type

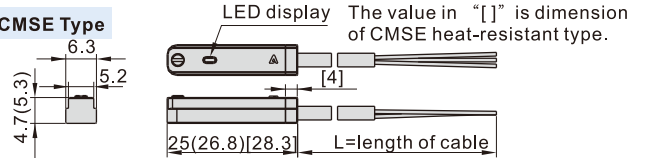


Note: The value in “( )” is dimension of CMSE type.

#### DMSH/CMSH Type

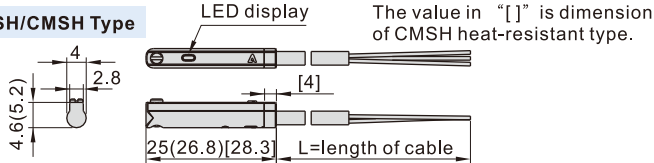


Note: The value in “( )” is dimension of CMSH type.

#### CMSJ Type

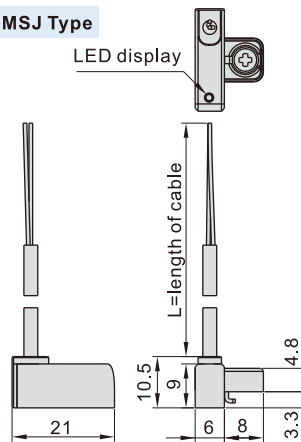


#### DMSJ Type

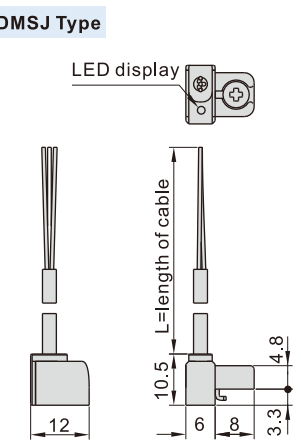


length of cable specification	length of cable(L)
020 Type	2000mm
030 Type	3000mm
050 Type	5000mm

#### EMSG Type

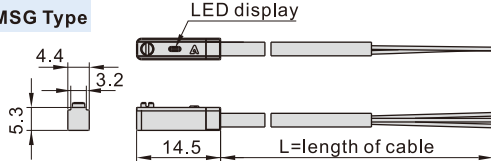

Note: a number in the bracket is the dimension of CMSH.


#### EMSH Type

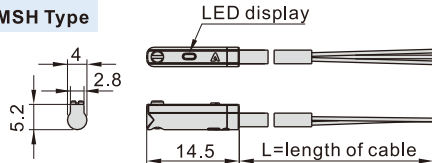


### Connection method

#### 2 wire, reed sensor connection


##### 1.General connection



##### 2.Series connection(And)

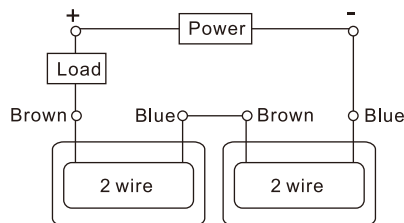


##### 3.Parallel connection(OR)

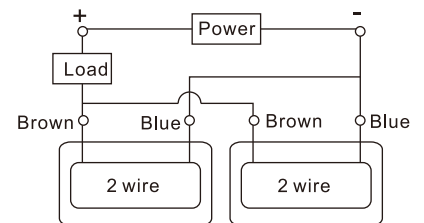


#### 3 wire, solid state NPN connection

##### 1.General connection




Note: The indicator lights will light up when both auto switches are turned NO.

##### 2.Series connection(And)

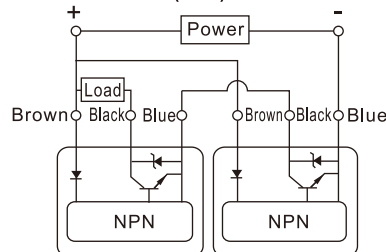


##### 3.Parallel connection(OR)

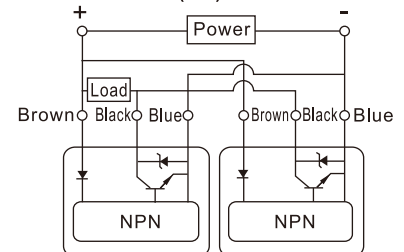


#### 3 wire, solid state PNP connection

##### 1.General connection




Note: The indicator lights will light up when both auto switches are turned NO.



##### 2.Series connection(And)

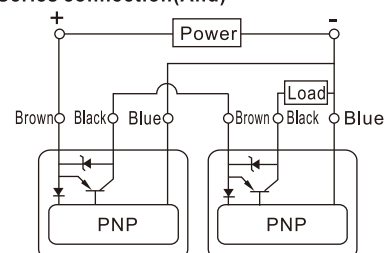



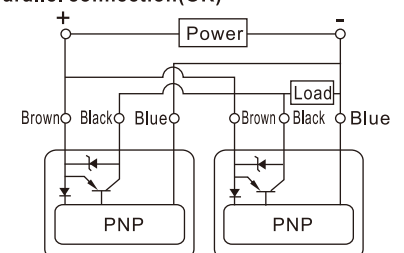



##### 3.Parallel connection(OR)







### The selection of sensor



DMSG	CMSG	EMSG	HFKL				MCK				ACQ/TACQ								ACQ			HF KP				RMT	RMT/RMTL							
 	10	16	20	25	25	32	40	50	63	80	12	16	20	25	32	40	50	63	80	100	125	140	160	16	20	25	32	10	16	20	25	32	40	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	HFK	HFK/HFKP				HFK	TCL/TCM								QCK				TR															
	10	16	20	25	32	40	6	10	12	16	20	25	32	40	50	63	80	100	12	16	20	25	32	40	50	63	6	10	16	20	25	32		
	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SAU					HFZ				HFY				HFP				MD/MK																	
32	40	50	63	80	100	6	10	16	20	25	32	40	6	10	16	20	25	32	10	16	20	25	32	6	10	16	20	25	32					
•	•	•	•	•	•				•	•	•	•							•	•	•	•	•	•	•	•	•	•	•	•	•	•		

		Stainless steel																																			
		PB/PBR				MI		MI/TMI				MI		MF				MG				MA/MAC															
  	6	8	10	12	16	8	10	12	16	20	25	32	40	20	25	32	40	20	25	32	40	50	63	16	20	25	32	40	50	63							
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
	Aluminum alloy						MBL				MCK				It needs an accessory to mount a sensor on a cylinder																						
20	25	32	40	50	63	40	50	63	80																												
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					

















		SGC				It needs an accessory to mount a sensor on a cylinder																							
  	125	160	200	250																									
	•	•	•	•																									

DMSJ	CMSJ	ACQ/TACQ								SDA								QCK				QDK			
 	32	40	50	63	80	100	12	16	20	25	32	40	50	63	80	100	32	40	50	63	20	25	32	40	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


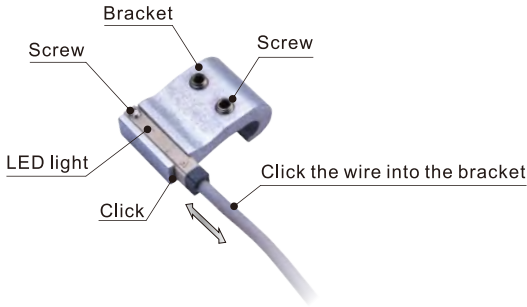
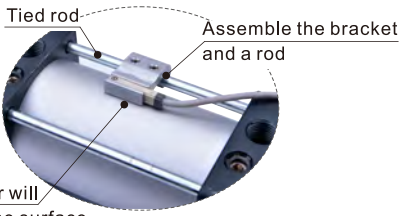



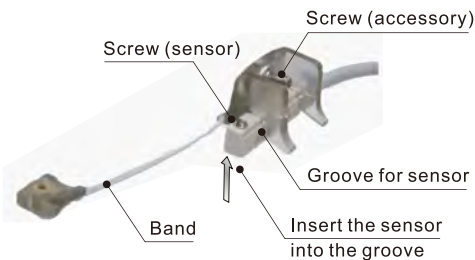
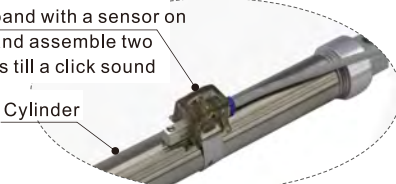

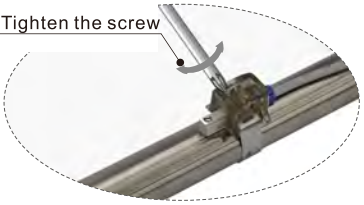
DMSH	CMSH	EMSH	ACQ			TC	HFZ					HFY	HFP	HFR				HFC						HFT								
 	125	140	160	6	10	6	10	16	20	25	32	40	6	32	10	16	20	25	32	16	20	25	32	40	50	63	10	16	20	25	32	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	QDK	HLQ/HLQL				HLS/HLSL				MU				HLH		MPG																
	20	25	32	40	6	8	12	16	20	25	6	8	12	16	20	25	6	8	10	12	16	20	6	10	16	20	6	8	10	12	16	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
HRQ					HFK					HLF			HGS			RMH			HFD													
2	3	7	10	20	30	50	70	100	200	10	16	20	25	32	40	8	12	16	20	6	8	10	12	10	16	20	25	8	12	16	20	25
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
HFKL			HFCQ				HRS				HF KP																					
10	16	20	25	16	20	25	32	40	50	63	10	15	20	30	40	16	20	25	32													
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•													

DMSE	CMSE	ACF						SAI/TSAI				SAI			ACE														
 	12	16	20	25	32	40	50	63	32	40	50	63	80	100	125	160	200	12	16	20	25	32	40	50	63	80	100	125	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

### Installation

Sensor model	Procedure		
<b>DMSG/CMSG/EMSG</b> 	<b>1</b>  <p>loose the screw</p> <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p> <p>Bottom of the sensor</p>	<b>2</b>  <p>Insert the sensor into the slot and adjust it to desired position</p> <p>Slot</p>	<b>3</b>  <p>Tighten the screw</p>
<b>DMSE/CMSE</b> 	<b>1</b>  <p>loose the screw</p> <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p> <p>Bottom of the sensor</p>	<b>2</b>  <p>Insert the sensor into the slot and adjust it to desired position</p> <p>Slot</p>	<b>3</b>  <p>Tighten the screw</p>
<b>DMSH/CMSH/EMSH</b> 	<b>1</b>  <p>loose the screw</p> <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p> <p>Bottom of the sensor</p>	<b>2</b>  <p>Insert the sensor into the slot and adjust it to desired position</p> <p>Slot</p>	<b>3</b>  <p>Tighten the screw</p>
<b>DMSJ/CMSJ</b> 	<b>1</b>  <p>loose the screw</p> <p>Sensor</p> <p>Screw</p> <p>Bottom of the sensor</p> <p>Adjust the metal part till the lateral shape can fit the slot of the cylinder</p>	<b>2</b>  <p>Insert the sensor into the slot and adjust it to desired position</p> <p>Slot</p>	<b>3</b>  <p>Tighten the screw</p>

## DMSG, EMS, CMS Series

Sensor model	Procedure	
<p data-bbox="101 247 279 301"><b>DMSG+(F-SC□SH)</b> <b>CMSG+(F-SC□SH)</b></p> 	<p data-bbox="318 239 333 260">1</p> 	<p data-bbox="909 239 925 260">2</p> 
	<p data-bbox="318 638 333 659">3</p> 	<p data-bbox="909 638 925 659">4</p> 
<p data-bbox="101 1041 279 1095"><b>DMSG+(F-MQ□)</b> <b>CMSG+(F-MQ□)</b></p> 	<p data-bbox="318 1032 333 1054">1</p> 	<p data-bbox="909 1032 925 1054">2</p> 
	<p data-bbox="318 1431 333 1453">3</p> 	<p data-bbox="909 1431 925 1453">4</p> 



### Sensor for "米" shape cylinder

SAI, SAU series will substitute for SI, SU series. And the corresponding sensors have some adjustments as the chart below.

New type(SAI)		Previous type(SI)	
Cylinder and accessory	<p><b>Cylinder</b></p> <p><b>Sensor</b></p> <p>CMSE \ DMSE</p>	Cylinder and accessory	<p><b>Cylinder</b></p> <p><b>Sensor</b></p> <p>CS1B1 / DS1B1 CS1B2 / DS1B2 CS1B3 / DS1B3 CS1B4 / DS1B4 CS1B5 / DS1B5 CS1B6 / DS1B6 CS1B7 / DS1B7</p> <p>CS1F/DS1F/CS1U/DS1U + F-SI32H/F-SI40H F-SI50H/F-SI63H F-SI80H/F-SI100H F-SI125H/F-SI160H F-SI200H</p>
Installation		Installation	
New type(SAU)		Previous type(SU)	
Cylinder and accessory	<p><b>Cylinder</b></p> <p><b>Sensor</b></p> <p>DMSG \ CMSG \ EMSG</p>	Cylinder and accessory	<p><b>Cylinder</b></p> <p><b>Sensor</b></p> <p>CS1B1 / DS1B1 CS1B2 / DS1B2 CS1B3 / DS1B3 CS1B4 / DS1B4</p> <p>CS1F/DS1F/CS1U/DS1U + F-SU32H/F-SU40H F-SU50H/F-SU63H F-SU80H/F-SU100H</p>
Installation		Installation	

### Socket

#### Ordering code

F - EC M08 B 020 - □




① ② ③ ④ ⑤ ⑥






① Category code	F : Accessory			
② Specification code	EC : Connecting Wire			
③ Socket type	M08:M8 socket	M12:M12 socket		
④ Wire type	B: 2-wire type		C:3-wire type	
⑤ Wire length	020: 2 meters	030:3meters	050:5meters	100:10meters
⑥ Additional specification	Blank: General type			

#### Appearance

##### M8 socket

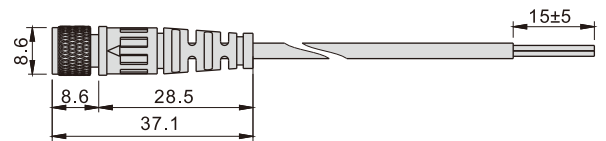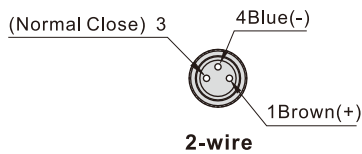

##### M12 socket

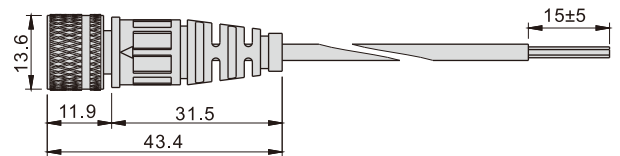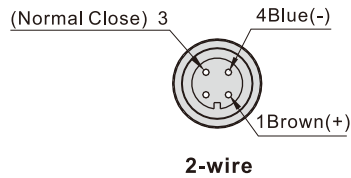

### Instruction

1. Sensor shall not fall down or bear great impact when it is installed.
2. The wire of the Sensor shall not move with the action of cylinder.
3. Clamping torque shall be within the allowable scope when the Sensor is installed(0.15~0.2Nm).
4. Sensor shall be installed in the middle position of the action scope.
5. Sensor wiring:
  - A. The wire is unable to bear repetitive torsion and tension. Please wire an external load before switch the power on.
  - B. No poor insulation in wire.
  - C. Do not wire with power line, high voltage line or use one wiring pipe.
  - D. Pleas wire the circuit correctly base on the circuit diagram.
6. Execute scheduled maintenance by the following guidelines:
  - A. Make sure the sensor is firmly fixed.
  - B. Make sure the wire is intact.
  - C. Make sure that LED indicate the movement of cylinder correctly.
7. Application of environment:
  - A. It is Not allow to use the sensor in the environment with explosive gas.
  - B. Magnetic sensor shall not be used in the environment with external magnetism.
  - C. Magnetic sensor shall not be used in the environment that is always eroded by water.
  - D. Magnetic sensor shall not be used in the environment with oil moisture or chemical substance.
  - E. Magnetic sensor shall not be used in the environment with periodically changing temperature.
  - F. Magnetic sensor shall not be used in the environment with excessively great impact.
  - G. Magnetic sensor shall not be used in the environment with sources of electrical pulse.
  - H. Avoid the environment with accumulated iron power and dense magnetic objects.