




Slide table cylinder——HLF Series

Compendium of HLF Series

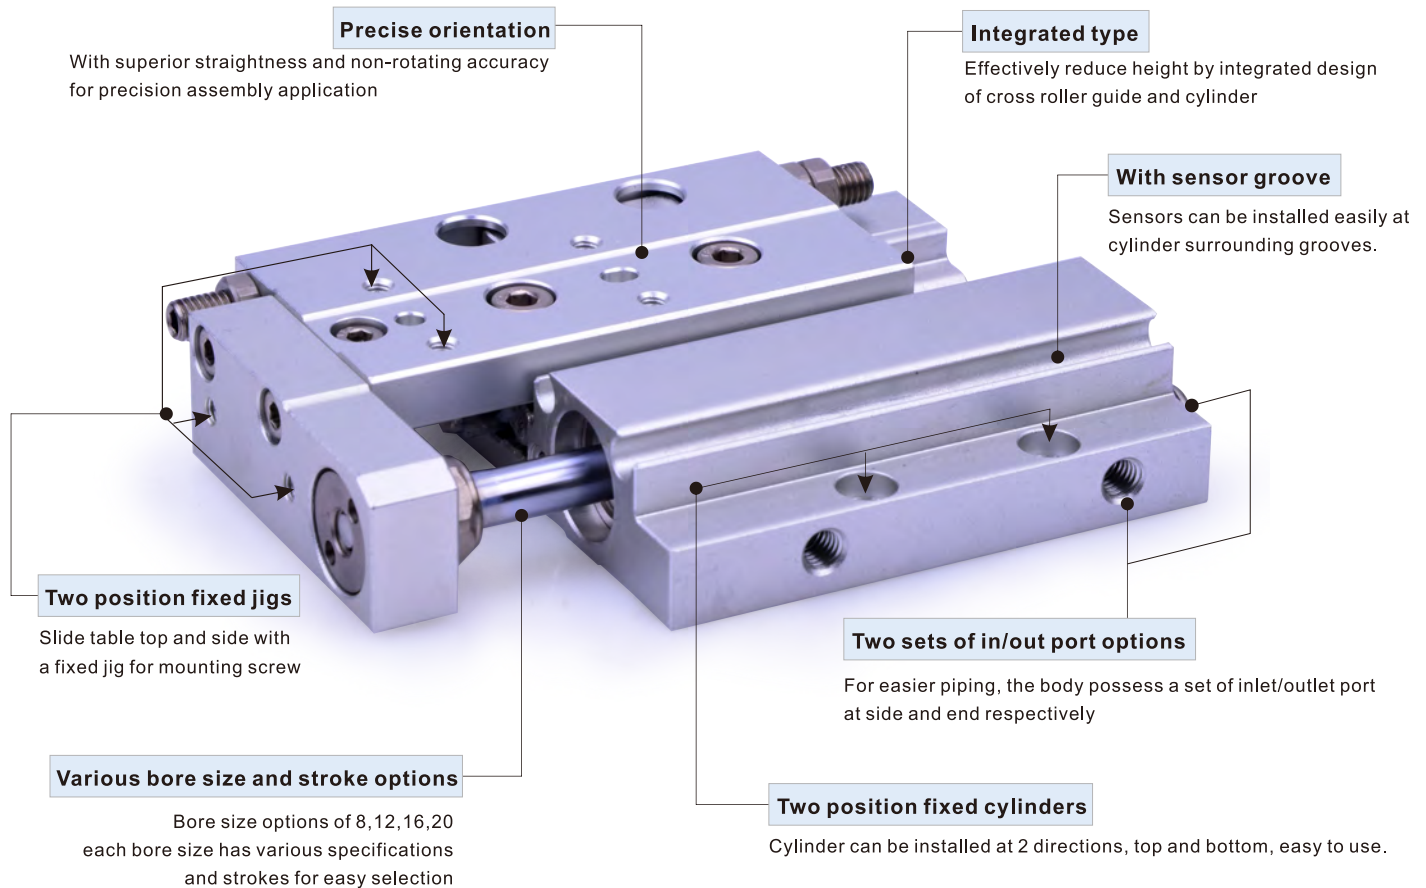

Criteria for selection: Cylinder thrust

Unit : Newton(N)

Bore size	Rod size	Acting type		Pressure area(mm ²)	Operating pressure(MPa)							
					0.1	0.2	0.3	0.4	0.5	0.6	0.7	
8	3	Double acting	Push-side	50.3	5.0	10.1	15.1	20.1	25.1	30.2	35.2	
			Pull-side	43.2	4.3	8.6	13.0	17.3	21.6	25.9	30.2	
12	4	Double acting	Push-side	113.1	11.3	22.6	33.9	45.2	56.5	67.9	79.2	
			Pull-side	100.5	10.1	20.1	30.2	40.2	50.3	60.3	70.4	
16	6	Double acting	Push-side	201.0	20.1	40.2	60.3	80.4	100.5	120.6	140.7	
			Pull-side	172.7	17.3	34.5	51.8	69.1	86.4	103.6	120.9	
20	8	Double acting	Push-side	314.0	31.4	62.8	94.2	125.6	157.0	188.4	219.8	
			Pull-side	263.8	26.4	52.8	79.1	105.5	131.9	158.3	184.7	

Installation and application



1. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of impurities into the cylinder.
2. The medium used by cylinder should be filtered to 40μm or below.
3. Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
4. If the cylinder is dismantled and stored for a long time, pay attention to conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports.



Slide table cylinder

HLF Series

Specification

Bore size(mm)	8	12	16	20
Acting type	Double acting			
Fluid	Air(to be filtered by 40μm filter element)			
Operating pressure	0.2~0.7MPa(29~100psi)(2.0~7.0bar)		0.15~0.7MPa(22~100psi)(1.5~7.0bar)	
Proof pressure	1.2MPa(175psi)(12.0bar)			
Temperature °C	-20~70			
Speed range mm/s	50~500			
Stroke tolerance	+1.0 0			
Cushion type	Bumper			
Sensor switches [Note1]	DMSH、CMSH、EMSH			
Port size	M3×0.5		M5×0.8	

[Note1] Refer to P576 for detail of sensor switch.

Symbol



Product feature

1. cross roller linear guide and cylinder integrated type design, effectively reducing cylinder thickness.
2. With superior straightness and non-rotating accuracy for precision assembly application.
3. cylinder can be installed from 2 directions.
4. Piping is possible from 2 directions.

Stroke

Bore size (mm)	Standard stroke (mm)	Max.std stroke
8	10 20 30	30
12	10 20 30 40 50	50
16	10 20 30 40 50 75 100	100
20	10 20 30 40 50 75 100	100

[Note] Consult us for non-standard stroke.


Ordering code

HLF 20 × 30 S

① ② ③ ④

① Model	② Bore size	③ Stroke	④ Magnet
HLF: Slide table cylinder (Roller type)	8 12 16 20	Refer to stroke table for details	S: With magnet

Inner structure and material of major parts

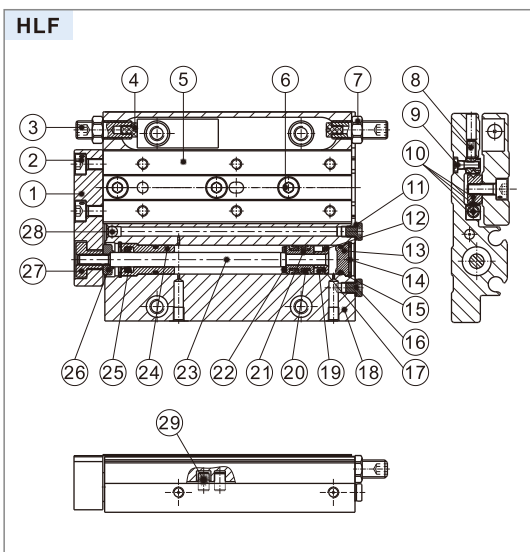


NO.	Item	Material	NO.	Item	Material
1	Fixed plate	Aluminum alloy	16	Plug screw	carbon steel
2	Hexagon socket head screws	Alloy steel	17	Magnet pad	NBR
3	Adjustable screw	Alloy steel	18	Body	Aluminum alloy
4	Bumper	TPU	19	Magnet	Sintered NdFeB
5	Slide table	Aluminum alloy	20	Piston packing	NBR
6	Hexagon socket head screws	Alloy steel	21	Piston	brass
7	Hex nut	Carbon steel	22	Bumper	TPU
8	Socket set screws	Alloy steel	23	Rod	Stainless steel
9	Hexagon socket head screws	Alloy steel	24	Front cover	Aluminum alloy
10	Roller assembly		25	Spool O ring	NBR
11	Gasket	Wear resistant material	26	Floating joint 2	Cutting steel
12	Magnet holder	brass	27	Floating joint 1	Cutting steel
13	Back cover	Aluminum alloy	28	Φ3 steel ball	Stainless steel
14	C clip	Spring steel	29	Pin	Stainless steel
15	O ring	NBR			

Slide table cylinder

HLF Series

Model Selection Method


Please select compact cylinder's type according to following procedure, and cross reference with data sheets.

Steps	Calculation formula, data	Example	
1、Conditions of Use: Consider installation, the shape of the workpiece, the conditions of use.	1. Model used(Bore size, Stroke) 2. Type of cushion(Bumper, Shock absorber) 3. Mounting position of work(Top, front) 4. Mounting direction(Axial, Vertical) 5. Average speed Va(mm/s) 6. Applied load W(kg) Fig. 1 7. Overhang Ln(mm) Fig. 2		1. Model used: HLF20X50 2. Type of cushion: Bumper 3. Mounting position of work: Table top mounting 4. Mounting direction: Horizontal arm installation 5. Average speed Va=300(mm/s) 6. Applied load W=0.5(kg) 7. Overhang L1=10mm L2=30mm L3=30mm
2、Kinetic energy check 1. Calculate kinetic energy of load E(J) 2. Calculate allowable kinetic energy Ea(J) 3. Check that kinetic energy of load doesn't exceed allowable kinetic energy: E≤Ea	$E=W \times (V/1000)^2 / 2$ Impact speed V=1.4(Correction factor (reference value))×Va $E_a=K \times E_{max}$ Mounting work coefficient K: Fig 3 Maximum allowable kinetic energy :Table 1 Kinetic energy of load(E)≤ Allowable kinetic energy(Ea)	$E=0.5 \times (420/1000)^2 / 2 = 0.044$ V=1.4×300=420 $E_a=1 \times 0.16 = 0.16$ $E=0.044 \leq E_a=0.16$ Can be used	
3、Load rate check 3-1、Concentrated load rate 1. Calculate allowable applied load Wa (kg) Note) In the case of vertical use, there is no need to discuss this load rate. (α 1=0) 2. Calculate load rate α 1. 3-2、Static moment rate 1. Calculate static moment M(N.m) 2. Calculate allowable static moment Ma(N.m) 3. Calculate static moment rate α 2 3-3、Dynamic moment rate 1. Calculate dynamic moment Me(N.m) 2. Calculate allowable dynamic moment Mea(N.m) 3. Calculate dynamic moment rate α 3. 3-4、Sum of load ratio The total load rate does not exceed 1, can be used.	$W_a=K \times \beta \times W_{max}$ Mounting work coefficient K : Fig 3 Applied load coefficient β : Map 1 Maximum allowable applied load Wmax: Table2 $\alpha 1=W/W_a$ $M=W \times 9.8(L_n+A_n)/1000$ Correction value for center position distance of moment An: Table3 $M_a=K \times \gamma \times M_{max}$ Mounting work coefficient K: Fig 3 Allowable moment coefficient γ : Map 2 Maximum allowable moment Mmax: Table4 $\alpha 2=M/M_a$ $M_e=(W_e \times 9.8(L_n+A_n)/1000)/3$ Impact equivalent mass $W_e= \delta \times W \times V$ δ Cushion factor With polyurethane bumper (standard)=4/100 Correction value for center position distance of moment An: Table3 $M_{ea}=K \times \gamma \times M_{max}$ Mounting work coefficient K: Fig 3 Allowable moment coefficient γ : Map 2 Maximum allowable moment Mmax: Table4 $\alpha 3=M_e/M_{ea}$ $\sum \alpha n = \alpha 1 + \alpha 2 + \alpha 3 \leq 1$	$W_a=1 \times 1 \times 4 = 4$ K=1 β =1 Wmax=4 $\alpha 1=0.5/4=0.125$ Yaw moment My $M_y=0.5 \times 9.8(10+11)/1000=0.11$ A3=11 $M_{ay}=1 \times 1 \times 9.14=9.14$ $M_{y_{max}}=9.14$ K=1 γ=1 $\alpha 2=0.11/9.14=0.012$ Pitch moment Mep $M_{ep}=(8.4 \times 9.8(30+17)/1000)/3=1.3$ $W_e=4/100 \times 0.5 \times 420=8.4$ A2=17 $M_{eap}=1 \times 0.7 \times 9.14=6.40$ K=1 γ=0.7 $M_{p_{max}}=9.14$ $\alpha 3=1.3/6.40=0.20$	Roll moment Mr $M_r=0.5 \times 9.8(30+17)/1000=0.23$ A6=17 $M_{ar}=9.14$(Same as May) $\alpha '2=0.23/9.14=0.025$ Yaw moment Mey $M_{ey}=(8.4 \times 9.8(30+34)/1000)/3=1.8$ $W_e=8.4$ A4=34 $M_{ey}=6.4$(Same as Meap) $\alpha '3=1.8/6.4=0.28$
Depent on: $\sum \alpha n = \alpha 1 + \alpha 2 + \alpha '2 + \alpha 3 + \alpha '3$ $= 0.125 + 0.012 + 0.025 + 0.20 + 0.28 = 0.642 \leq 1$ Can be used.			

Slide table cylinder

HLF Series

Fig. 1 Applied load : W(kg)

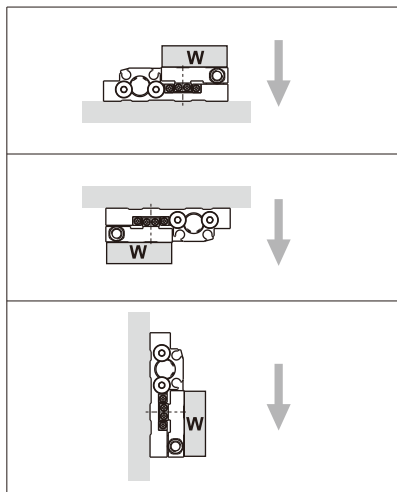

Note: The state of vertical use does not need to consider this load rate.

Fig 3 Mounting work coefficient: K

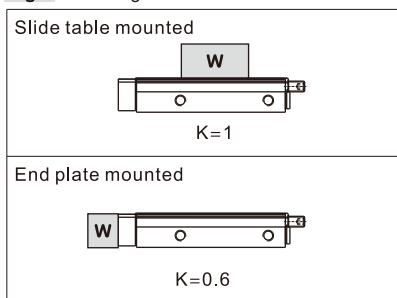


Table2 Maximum allowable applied load: Wmax(kg)

Model	Wmax
HLF8	0.6
HLF12	1
HLF16	2
HLF20	4

Table4 Maximum allowable moment : Mmax(N.m)

Type	Stroke (mm)					
	10	20	30	50	70	100
HLF8	0.56	0.78	0.98	-	-	-
HLF12	-	1.65	2.22	3.34	-	-
HLF16	-	-	3.41	5.69	7.96	-
HLF20	-	-	6.66	9.14	13.70	18.27

Symbol and Unit

Symbol	Item	Unit	Symbol	Item	Unit
An(n=1 ~ 6)	Correction value for center position distance of moment	mm	Va	Average speed	mm/s
E	Kinetic energy	J	W	Applied load	kg
Ea	Allowable kinetic energy	J	Wa	Allowable applied load	kg
Emax	Maximum allowable kinetic energy	J	We	Impact equivalent load	kg
Ln(n=1 ~ 3)	Overhang	mm	Wmax	Maximum allowable applied load	kg
M(Mp, My, Mr)	Static moment(Pitch、Yaw、Roll)	N. m	α	Load rate	-
Ma(Map, May, Mar)	Allowable static moment(Pitch、Yaw、Roll)	N. m	β	Applied load coefficient	-
Me(Mep, Mey)	Dynamic moment(Pitch、Yaw)	N. m	γ	Allowable moment coefficient	-
Mea(Meap, Meay)	Allowable dynamic moment(Pitch、Yaw)	N. m	δ	Bumper	-
Mmax(Mpmax, Mymax, Mrmax)	Maximum allowable static moment(Pitch、Yaw、Roll)	N. m	K	Mounting work coefficient	-
V	Impact speed	mm/s			

Fig. 2 Overhang: Ln(mm)、Correction value for center position distance of moment: An(mm)

	Pitch moment Mp	Yaw moment My	Roll moment Mr
Static moment			
Dynamic moment			-

Note: Static moment: Generated by gravity.
Dynamic moment: Generated by the impact when the limiter is impacted.

Table 1 Maximum allowable kinetic energy : Emax(J)


Type	Emax(Bumper)
HLF8	0.027
HLF12	0.055
HLF16	0.11
HLF20	0.16

Table3 Correction value for center position distance of moment: An(mm)


Model	An					
	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆
HLF8	6 Note1	10	6 Note1	21	21	10
HLF12	10	11	10	23	23	11
HLF16	10	12	10	28	28	12
HLF20	11	17	11	34	34	17

Note1: Only HLF8X10 is 16mm.

Map 1 Applied load coefficient : β

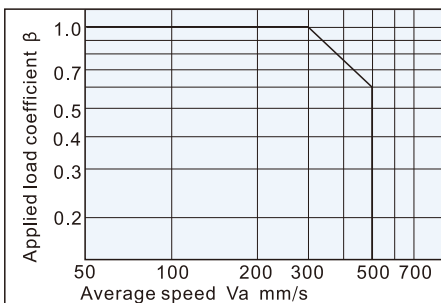

Map 2 Allowable moment coefficient: γ

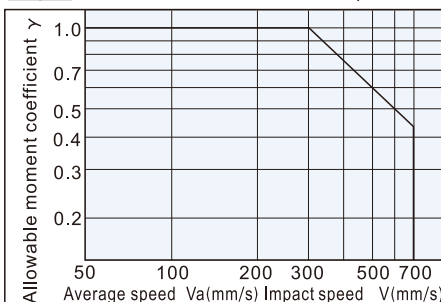


Note: Calculate static moment using average speed
Calculate dynamic moment using impact speed

Slide table cylinder


HLF Series

Dimensions

HLF8

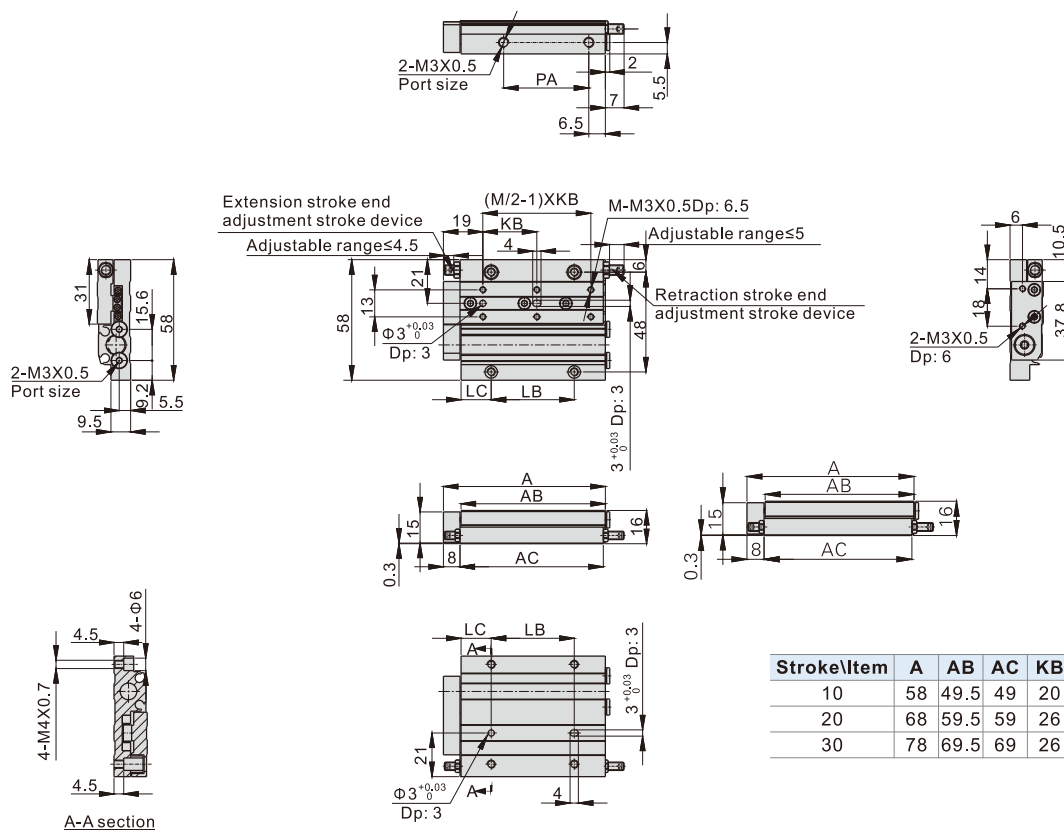

HLF12

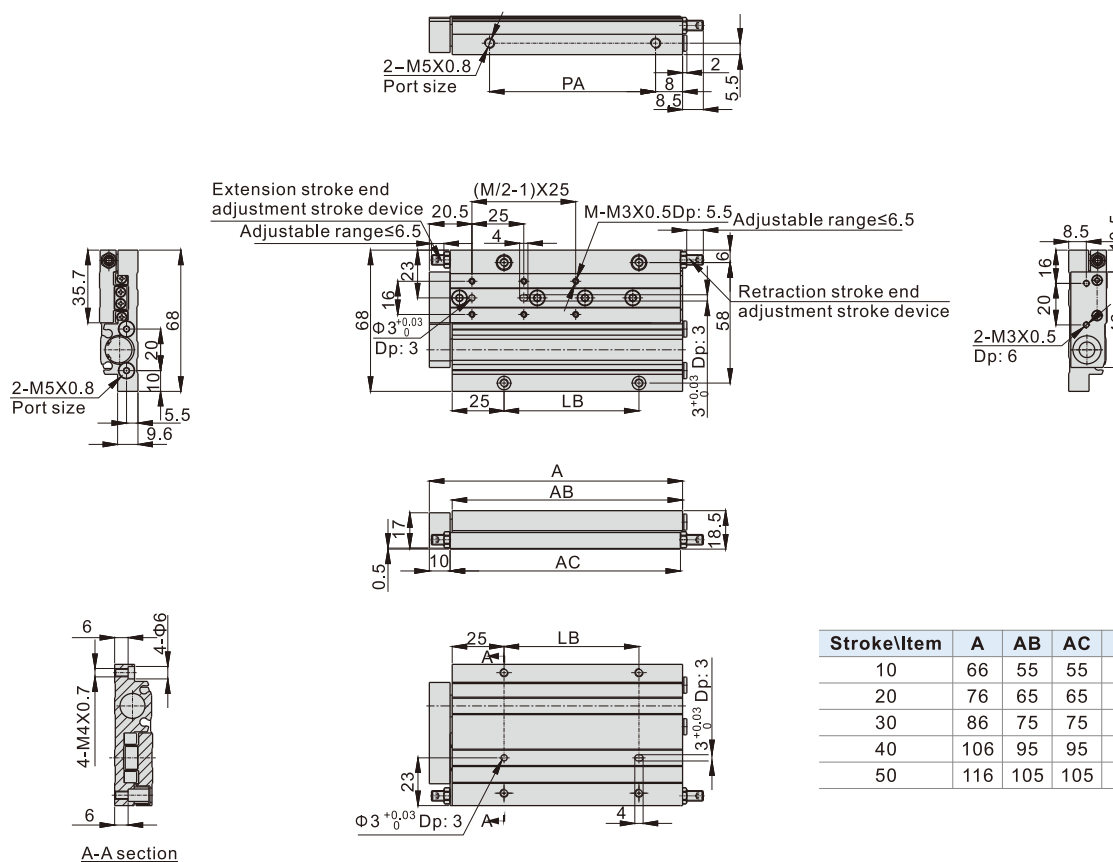

HLF Series

Technical drawing of the M500 series hydraulic cylinder, showing front, side, and end views with dimensions and a table of stroke lengths.

Front View Dimensions:

- Port size: 2-M5X0.8
- Adjustable ranges ≤ 5.5
- Extension stroke end adjustment stroke device
- Retraction stroke end adjustment stroke device
- Adjustable ranges ≤ 5.5
- Stroke length: PA
- Dimensions: 24, 35, 5, 8, 7, 2, 8, 5, 11.5, 49.5, 88, 12.5, 23, 5.5, 20, 31.5, 88, 20, 31.5, 4^{+0.03}₀ Dp: 4, 76, 4^{+0.03}₀ Dp: 4, 7, 22, 10, 0.5, 20.5, 7, N-φ7.5, 7, N-M5X0.8, 7, 31.5, 5, 4^{+0.03}₀ Dp: 4, 184, 173, 173, 45, 39

Side View Dimensions:

- Stroke length: A, AB, AC, LB, LC
- Dimensions: 24, 35, 5, 8, 7, 2, 8, 5, 11.5, 49.5, 88, 12.5, 23, 5.5, 20, 31.5, 88, 20, 31.5, 4^{+0.03}₀ Dp: 4, 76, 4^{+0.03}₀ Dp: 4, 7, 22, 10, 0.5, 20.5, 7, N-φ7.5, 7, N-M5X0.8, 7, 31.5, 5, 4^{+0.03}₀ Dp: 4, 184, 173, 173, 45, 39

End View Dimensions:

- Stroke length: A, AB, AC, LB, LC
- Dimensions: 24, 35, 5, 8, 7, 2, 8, 5, 11.5, 49.5, 88, 12.5, 23, 5.5, 20, 31.5, 88, 20, 31.5, 4^{+0.03}₀ Dp: 4, 76, 4^{+0.03}₀ Dp: 4, 7, 22, 10, 0.5, 20.5, 7, N-φ7.5, 7, N-M5X0.8, 7, 31.5, 5, 4^{+0.03}₀ Dp: 4, 184, 173, 173, 45, 39

Table of Stroke Lengths (mm):

Stroke\Item	A	AB	AC	LB	LC
10	74	63	63	25	20
20	84	73	73	25	29
30	94	83	83	25	29
40	114	103	103	45	29
50	124	113	113	45	29
75	159	148	148	45	39
100	184	173	173	45	39

Stroke\Item	A	AB	AC	LB	LC	M	N	PA
10	74	63	63	25	20	4	4	27
20	84	73	73	25	29	4	4	44
30	94	83	83	25	29	4	4	54
40	114	103	103	45	29	6	4	74
50	124	113	113	45	29	6	4	84
75	159	148	148	45	39	6	6	119
100	184	173	173	45	39	6	6	144

Technical drawing of the HPM1000 series hydraulic cylinder, showing side, end, and section views with dimensions and a specification table.

Dimensions and Labels:

- Side View (Top):** Shows overall length PA, port size 2-M5X0.8, and adjustment stroke device details. Adjustable ranges are ≤7.5.
- Side View (Bottom):** Shows overall length AC, port size 2-M5X0.8, and adjustment stroke device details. Adjustable range is ≤7.5.
- End View (Left):** Shows port size 2-M5X0.8, overall width 51.5, and adjustment stroke device details. Adjustable range is ≤7.5.
- End View (Right):** Shows port size 2-M5X0.8, overall width 64.8, and adjustment stroke device details. Adjustable range is ≤7.5.
- Section A-A:** Shows internal components, port size 2-M5X0.8, and adjustment stroke device details. Adjustable range is ≤7.5.

Table 1: Dimensions (mm)

Stroke\Item	A	AB	AC	KB	LB	LC
10	84	71	71	50	20	20
20	94	81	81	60	30	20
30	104	91	91	60	30	20
40	124	111	111	60	45	20
50	134	121	121	60	45	30
75	169	156	156	60	45	40
100	194	181	181	60	45	50

Stroke\Item	A	AB	AC	KB	LB	LC	M	N	PA
10	84	71	71	50	20	29	4	4	41
20	94	81	81	60	30	29	4	4	51
30	104	91	91	60	30	29	4	4	61
40	124	111	111	60	45	29	4	4	81
50	134	121	121	60	45	36	4	4	91
75	169	156	156	60	45	40	6	6	126
100	194	181	181	60	45	59	6	6	151